



3 Eucker St., Ridgefield Park, NJ 07660
201.641.2880 fax.201.641.0847

SHORING

Adjustable Timber Jacks

Ideal for uniform story heights. Perfect for reshoring.
Acme threads for ease of use. Exceeds safe loads of 4" x 4"
and 6" x 6" lumber. Height adjustments of up to 6".

EDC adjustable Timber Jacks are ideal for reshoring. With adjustment handles that turn easily on machined threads, EDC Timber Jacks are perfect for shoring at uniform or near-uniform story heights. By employing Timber Jacks in addition to standard steel post shores, you save time, and cut down on waste.

Conforms to NYC Building Code:
Sub-Chapter 19, Article 5, Section 27-1035.


Specifications:

EDC 4"X4" TIMBER JACK (10K)

4"x4"x5" box, 1½"x6" tubing.
Heavy Acme Threaded Screw.
10" closed, 16" extended.
6" standard height adjustment.
Safe load 10K* with 2.5:1 safety factor.
Weight: 12 lbs.

EDC 6"X6" TIMBER JACK (15K)

6"x6"x4" box, 2"x6½" tubing.
Heavy Acme Threaded Screw.
10" closed, 16" extended.
6" standard height adjustment.
Safe load 15K* with 2.5:1 safety factor.
Weight: 22 lbs.

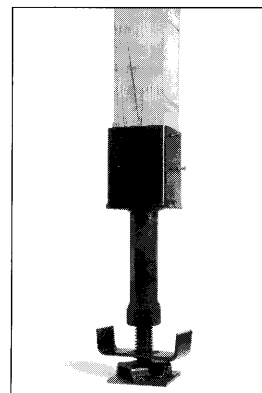

Typical timber jack application with 4x4.

To order or for more information, call toll free

1-877-SHORING
www.edconline.com

* Timber Jack Rating Only.

SHORING

Adjustable Timber Jacks